

C-4001 CHAMPION INDUSTRIAL SPARK PLUG

This plug is a newly designed High-Performance spark plug. The improved ceramic material allows high voltage strength for future application.


Tenneco's new M14 J-Gap series with Double Iridium electrodes starts with new nomenclature. C-4001 stands for double Iridium M14 J-Gap high performance spark plugs developed for usage in natural gas engines in stationary and transient applications.







C-4001

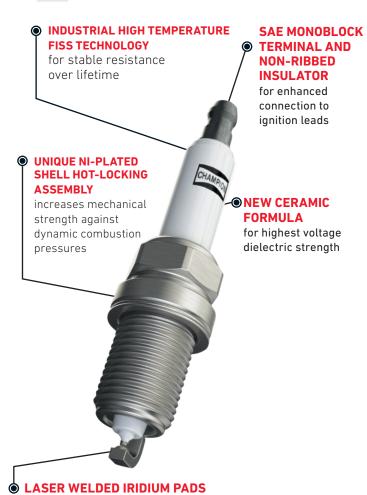

Electrode Gap, Nom.



Electrode Resistance

2 kΩ 3 - 12 kΩ


Federal-Mogul Ignition GmbH Bürgermeister-Schmidt-Str. 17 51399 Burscheid, Germany https://ignition.tenneco.com

@ 2020 Tenneco Inc. All rights reserved. All trademarks are owned by Tenneco Inc. or one of its subsidiaries, in one or more countries. C-4001 Rev 11/2021

Basic Technical Data

Properties	C-4001
Suppressor Resistor	3 - 12 kΩ
Hex	16mm
Thread	M14x1,25
Thread length	19mm
Precious metals	lridium/lridium
Electrode gap	nom. 0.25
Tightening Torque (Cast iron)	30-40Nm

Dimensions

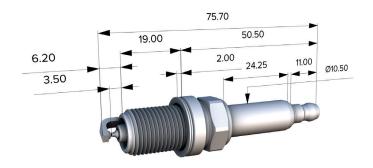

Target Applications

• stationary Biogas or Natural Gas Engines

Engines

16 kΩ

• Scania, MAN 2G, Cummins, Perkins

Cross References

• Denso GK 3-1, GK3-5